


The same all stainless steel construction, and Fab-Tech's proprietary fluoropolymer coating, but at a **lower cost!** 



## 16"-48" HIGH VALUE HEAVY DUTY INDUSTRIAL SINGLE BLADE DAMPER (HVD)

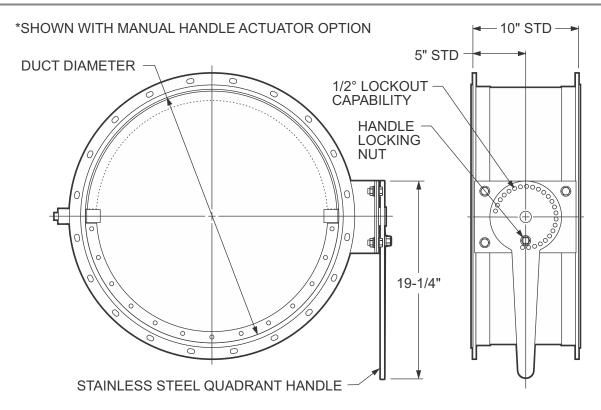

## **SPECIFICATIONS**

**Body:** Stainless steel body, rolled 12 GA fully fusion welded

**Coating:** Components in contact with airstream coated with proprietary fluoropolymer barrier coating

**Angle Rings:** Fully coated black iron rings, loose ring construction up to 30" diameter ℰ stitch welded rings

for 32" diameter and larger dampers - mounting holes straddle vertical centerline

Blade: Stainless steel .250", opens CCW, Open/Close torque: 1000 in-lb recommended minimum

**Axles:** Stainless steel 1.38" diameter

**Quadrant:** Manual locking handle, all stainless steel construction with lockout capability in 1/2° intervals

**Blade Stops:** Keyed fully welded blade stops

**Bearings:** Nylon

**Shaft Seals:** Thermoplastic liquid tight seals

Blade Seal: Viton

**OPTIONS** 

**Actuators:** Manual gear drive / electric / pneumatic actuators

**Mounting:** Blank mounting kit (plate & shaft adapter) for customer supplied actuator

Rings: Stainless steel rings available, custom hole pattern

## Contact us today for more information:

Call: **802-655-8800** Fax: **802-655-8804** 

Website: **www.fabtechinc.com** Email: **sales@fabtechinc.com** 



Fab-Tech, Inc. 480 Hercules Drive Colchester, VT 05446-6800 USA

 $\ensuremath{\mathsf{PSP}^{\ensuremath{\varnothing}}}$  is a registered trademark of Fab-Tech, Inc.

Technical information contained in this document is subject to change without notice.

© FAB-TECH INC. 2016 REV: 1/5/16 HVHDDamper

<sup>\*</sup> Damper shown on cover: 24" diameter with loose black iron angle rings